



Fulbrook Lane, Sherbourne,
Warwick, CV35 8AR, ENGLAND

Tel: 01926 624800
Fax: 01926 624900

LYNX MICRO SYSTEM

MOBILE TELEPHONE LEAD (GENERIC)

REF: E029-2 17-05-08

INSTALLATION INSTRUCTIONS

The Mobile Telephone Lead allows mobile telephones to be connected to Lynx equipment.

WARNING:

By exerting excessive force it is possible to insert the connector incorrectly resulting in damage to the connector pins.

When correctly aligned minimal force is required to make the connection.

The connector may be bayonet locked after insertion by rotating the outer locking ring clockwise.


ROTATE THE OUTER LOCKING RING TO ALIGN THE INTERNAL KEYS WITH THE CENTRAL KEY WAY BEFORE INSERTING THE PLUG.

DO NOT FORCE THE CONNECTION.

NOTE:

An additional phone specific adapter is also supplied for mobile telephones that are not equipped with a 2.5mm jack plug socket.

Some telephones will not work correctly unless the adapter is connected to the telephone before the lead is connected to the adapter.

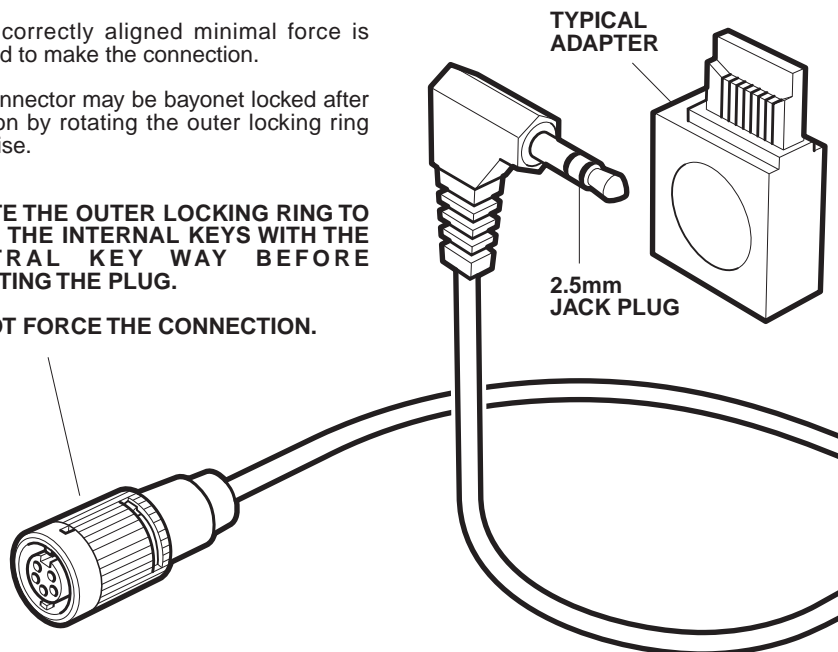

IMPORTANT

READ THIS INFORMATION CAREFULLY BEFORE
ATTEMPTING TO USE THIS ITEM OF EQUIPMENT