


Fulbrook Lane, Sherbourne, Warwick, CV35 8AR, ENGLAND

> Tel: 01926 624800 Fax: 01926 624900

P.T.T. EXTENSION LEAD

REF: E040-0 21-10-02

INSTALLATION INSTRUCTIONS

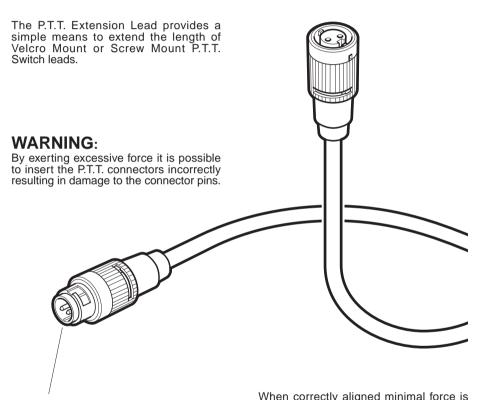

ROTATE THE OUTER LOCKING RING TO ALIGN THE KEY WAYS BEFORE INSERTING THE PLUG.

DO NOT FORCE THE CONNECTION.

When correctly aligned minimal force is required to make the connection.

The connector may be bayonet locked after insertion by rotating the outer locking ring clockwise.

IMPORTANT

READ THIS INFORMATION CAREFULLY BEFORE ATTEMPTING TO USE THIS ITEM OF EQUIPMENT